

Key Features

Bright Images in Large Spaces | Long-Lasting Laser Phosphor Light Source | Reliable 24/7 Operation | 360-Degree Orientation | Peace of Mind



Product Description


Bright and versatile for any professional installation, the ViewSonic® LS750WU WUXGA laser projector delivers everything you need for big screens in big venues. Delivering 5,000 lumens of advanced high brightness, 300,000:1 contrast ratio, and up to 20,000 hours* of light source life, this projector is ideal for auditoriums, lecture halls, large boardrooms, houses of worship, and more. Thanks to SuperColor™ technology, content is brought to life with captivating color, crisp graphics, and stunning videos no matter the environment. This top-notch performer is also easy to deploy and manage with its wide 1.3x optical zoom adjustment, vertical/horizontal keystone, and 4-corner adjustment that provides extreme flexibility in even the most challenging installations. Moreover, 360-degree tilt angle projection and 24/7 operation allow for extreme mounting flexibility. The ViewSonic® LS750WU is the ideal WUXGA laser projector for professional installations, large venues, and business and education environments. *Light source life may vary based on actual usage and other factors.



- 01. IR remote sensor
- 02. Projection lens
- 03. Elevation feet
- 04. Control Panel


- 05. Power Button
- 06. Zoom/Focus
- 07. USB 2.0 Type A
- 08. HDMI x2

- 09. AC In
- 10. Kensington® Lock Slot
- 11. VGA
- 12. Monitor Out

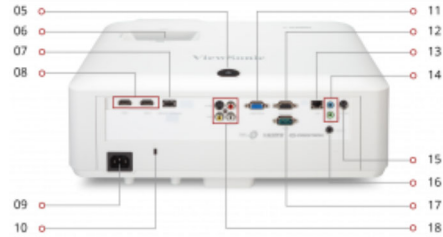

- 13. LAN
- 14. Audio In/Out
- 15. 3D VESA (Sync)
- 16. 12V Trigger


- 17. RS232
- 18. Composite AV In



1920 x 1200
RESOLUTION



5,000 ANSI
LUMENS



1.13-1.47
THROW RATIO

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Type:	DLP Laser
Resolution Type:	WUXGA (1920x1200)
Resolution:	1920 x 1200
Brightness (Lumens):	5,000 ANSI
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Throw Distance:	2.4 - 31.2 ft / 0.7 - 9.5 m
Throw Ratio:	1.13-1.47
Keystone:	Vertical (± 40°) / Horizontal (± 40°)
Lens:	1.3x optical zoom
Light Source (watt):	Nichia 67W x2

Light Source Life, Normal (hours):	20000
Light Source Life, Dynamic Eco-Mode (hours):	20000
Color Depth:	1.07B Color (R/G/B 10bit)
Dynamic Contrast Ratio:	3,000,000:1
Aspect Ratio:	16:10

Video Signal:

Frequency Horizontal:	15K-102KHz
Frequency Vertical:	23-120Hz

Compatibility:

PC Resolution (max):	1920 x 1200
PC Resolution (min):	640 x 480
Mac® Resolution (max):	1920 x 1200
Mac® Resolution (min):	640 x 480

Connector:

USB 2.0 Type A(1), Ethernet LAN (RJ45)(1), 3.5mm 12V Trigger(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS-232)(1), HDMI 1.4 (with HDCP 1.4)(2), VGA In(1), VGA Out(1), Composite RCA Video In(1), S-Video In(1), RCA Audio In (L/R)(1), 3D VESA(1)

Audio:

Internal Speakers:	10W (x2)
--------------------	----------

Controls:

On Screen Display:	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)
--------------------	--

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	0-90%

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Weight (imperial):

Net (lbs):	13.0
Gross (lbs):	18.5

Weight (metric):

Net (kg):	5.9
Gross (kg):	8.4

Dimensions (imperial) (WxHxD):

Packaging (in.):	20.3 x 19.3 x 10.9
Physical (in.):	15.9 x 12.0 x 5.7

Dimensions (metric) (WxHxD):

Packaging (mm):	515.0 x 490.0 x 276.0
Physical (mm):	405.0 x 305.0 x 145.0

General:

Regulations: FCC, cTUVus, ROHS

PACKAGE CONTENTS: LS750WU projector, Power Cable, VGA Cable, Remote Control, Quick Start Guide

Warranty: Five-year limited warranty on parts and labor, 1-year limited warranty on the light source, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907003048

Accessories:

IFP2410, IFP2710, PGD-350, PJ-SCW-1001W, PJ-WMK-006, PJ-WMK-007, VC10, VCB10